



LMK 807

Plastic Probe for Aggressive Media

Ceramic Sensor

accuracy according to IEC 60770:
0.5 % FSO

Nominal pressure

from 0 ... 4 mH₂O up to 0 ... 100 mH₂O

Output signals

2-wire: 4 ... 20 mA
others on request

Special characteristics

- ▶ diameter 35 mm
- ▶ good long term stability
- ▶ easy handling

Optional versions

- ▶ SIL 2 (Safety Integrity Level)
according to IEC 61508 / IEC 61511
- ▶ different kinds of cables
and elastomers
- ▶ customer specific versions
e. g. special pressure ranges

The plastic submersible probe LMK 807 is designed for continuous level measurement for highly polluted and aggressive media.

Basic element of the plastic submersible probe is the flush mounted ceramic sensor, which makes cleaning easier when solid parts of the medium deposit on it. Different cable and elastomer materials are available in order to achieve maximum media compatibility.

Preferred areas of use are

Sewage



waste water treatment
water recycling
dumpsite



Aggressive media

level measurement
in most of acids and lyes



Input pressure range									
Nominal pressure gauge	[bar]	0.4	0.6	1	1.6	2.5	4	6	10
Level	[mH ₂ O]	4	6	10	16	25	40	60	100
Overpressure	[bar]	1	2	2	4	4	10	10	20
Burst pressure ≥	[bar]	2	4	4	5	5	12	12	25

Output signal / Supply		
2-wire	4 ... 20 mA / V _S = 8 ... 32 V _{DC}	SIL-version: V _S = 14 ... 28 V _{DC}
Performance		
Accuracy ¹	≤ ± 0.5 % FSO	
Permissible load	R _{max} = [(V _S - V _{S min}) / 0.02 A] Ω	
Influence effects	supply: 0.05 % FSO / 10 V	load: 0.05 % FSO / kΩ
Long term stability	≤ ± 0.1 % FSO / year at reference conditions	
Response time	≤ 10 msec	

¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (Offset and Span)		
Thermal error	≤ ± 0.2 % FSO / 10 K	in compensated range 0 ... 70 °C

Permissible temperatures		
Permissible temperatures	medium / electronic / environment / storage:	-25 ... 80 °C

Electrical protection ²	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326

² additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available on request

Electrical connection	
Cable with sheath material ³	PVC (-5 ... 70 °C) grey Ø 7.4 mm PUR (-25 ... 70 °C) black Ø 7.4 mm FEP ⁴ (-25 ... 70 °C) black Ø 7.4 mm others on request
Cable capacitance	signal line/shield also signal line/signal line: 160 pF/m
Cable inductance	signal line/shield also signal line/signal line: 1 µH/m
Bending radius	static installation: 10-fold cable diameter dynamic application: 20-fold cable diameter

³ shielded cable with integrated ventilation tube for atmospheric pressure reference


⁴ do not use freely suspended probes with an FEP cable if effects due to highly charging processes are expected

Materials (media wetted)	
Housing	PP-HT
Seals	FKM, EPDM, FFKM
Diaphragm	ceramics Al ₂ O ₃ 96 %
Protection cap	POM-C
Cable sheath	PVC, PUR, FEP

Miscellaneous	
Option SIL 2 version	according to IEC 61508 / IEC 61511
Current consumption	max. 25 mA
Weight	approx. 200 g (without cable)
Ingress protection	IP 68
CE-conformity	EMC Directive: 2014/30/EU


Wiring diagram

2-wire-system (current)



Pin configuration	
Electrical connection	cable colours (IEC 60757)
Supply +	WH (white)
Supply -	BN (brown)
Shield	GYNE (green-yellow)

Dimensions (mm / in)

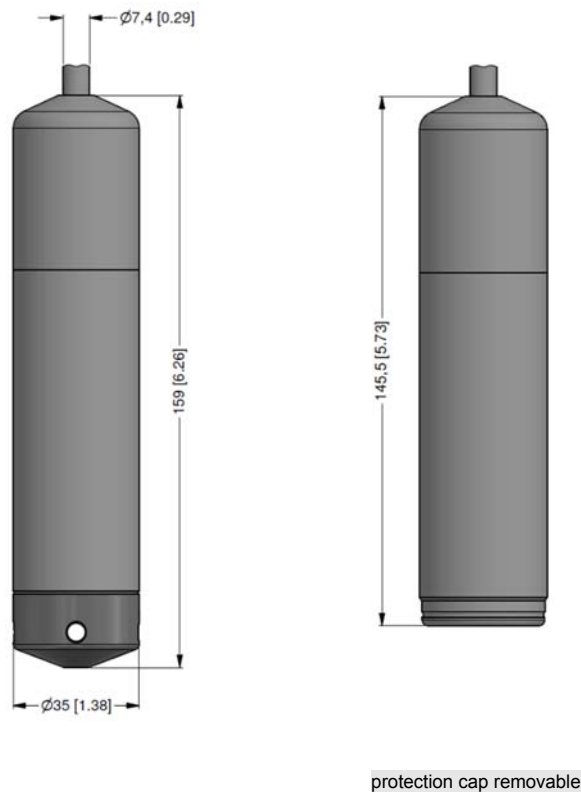

Accessories

Terminal clamp



Technical data

Suitable for	all probes with cable Ø 5.5 ... 10.5 mm		
Material of housing	standard: steel, zinc plated	optionally: stainless steel 1.4301 (304)	
Material of clamping jaws and positioning clips	PA (fibre-glass reinforced)		
Dimensions (mm)	174 x 45 x 32		
Hook diameter	20 mm		
Ordering type	Ordering code	Weight	
Terminal clamp, steel, zinc plated	Z100528	approx. 160 g	
Terminal clamp, stainless steel 1.4301 (304)	Z100527		

© 2019 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code LMK 807

LMK 807

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----

Pressure																			
		in bar	3	9	0														
		in mH ₂ O	3	9	1														
Input	[mH ₂ O]	[bar]																	
	4	0.4				4	0	0	0										
	6	0.6				6	0	0	0										
	10	1.0				1	0	0	1										
	16	1.6				1	6	0	1										
	25	2.5				2	5	0	1										
	40	4.0				4	0	0	1										
	60	6.0				6	0	0	1										
	100	10				1	0	0	2										
		customer				9	9	9	9										consult
Housing																			
		PP-HT								R									
		customer								9									consult
Diaphragm																			
		ceramics Al ₂ O ₃ 96%								2									
		customer								9									consult
Output																			
		4 ... 20 mA / 2-wire								1									
		SIL2 4 ... 20 mA / 2-wire								1S									
		customer								9									consult
Seals																			
		FKM								1									
		EPDM								3									
		FFKM								7									
		customer								9									consult
Accuracy																			
		0.5 % FSO								5									
		customer								9									consult
Electrical connection																			
		PVC-cable (grey, Ø 7.4 mm) ¹								1									
		PUR-cable (black, Ø 7.4 mm) ¹								2									
		FEP-cable (black, Ø 7.4 mm) ¹								3									
		customer								9									consult
Cable length																			
		in m								9	9	9							
Special version																			
		standard													0	0	0		
		customer													9	9	9		consult

¹ shielded cable with integrated ventilation tube for atmospheric pressure reference