

BDT33 – Safety process pressure gauge 100mm with LoRa signal

Product description

Badotherm pressure gauge model BDT33 is the solid front, safety pattern gauge according the highest class of the EN 837-1 / 9.7.2 and ANSI B 40.1. The BDT33 stainless steel safety gauge has a solid front baffle wall and a full blow-out back. The pressure gauge is equipped with connection to be fitted with a TWTG NEON transmitter for communication through a LoRaWAN network. The NEON transmitter has a battery life up to 10 years.

Design standard

EN837-1

Dial sizes, ranges & accuracy

Possibilities in ranges and accuracies are led by the dial size. Accuracy class is based on dry gauges.

Dial size	Ranges	Accuracy
100mm	0...1 to 0...250 bar	1.0% (sensor accuracy 0.3%)

Mounting variation

Not all gauges are suitable for some mounting variations. For the BDT33 series the mounting variations are below.

- **type A** (10) bottom connection, direct mounting



Process connection

Dial size	Standard thread	SW size
100mm	G ½ A or ½" NPT	17mm

-> See datasheet "thread information" for specific thread details

Materials of construction

	BDT33
Case	AISI 316
Bezel	AISI 316
Connection ¹	AISI 316(L)
Sensing element ¹	TP316Ti
Measuring cel ¹	Ceramic
Measuring cel gasket ¹	FPM (spec)
Movement	Stainless steel
Pointer	Aluminium
Dial	Aluminium
Window gasket	NBR
Blow out	AISI 316 with NBR compensation
Fill plug	NBR (HNBR for filled gauges)
Sensor seal ¹	FKM
Connector	Stainless Steel
Mounting flanges	AISI 316
Window	Laminated safety glass

*1 wetted materials

Pressure limitations

The gauge are built to withstand harsh environments however the EN 837 limits the use of a pressure gauge according below table.

Pressure gauge

Dial size	Steady	Fluctuating	Short time
100mm	0.75 x FSV	0.67 x FSV	FSV

FSV: full scale value

Pressure sensor

Measuring range	Over pressure	Long term stability
<4 bar	3x FSV	± 0.25% FSV
>4...60 bar	2.5x FSV	
>60 bar	2 FSV	

Temperature limitations

The gauges can withstand ambient and process temperature up to a certain limit. The limitations on temperature are:

	Ambient	Medium	Storage
Dry case	-40°C ...+80°C	-30°C...+150°C	-40°C...+70°C

The variation of indication caused by the effect of temperature shall not exceed:

Pressure gauge: $\pm 0.4\%$ / 10K FSV

Pressure sensor: $\pm 0.2\%$ / 10 K FSV

Window

Standard BDT33 gauges have a laminated safety glass window.

Pointer

Standard pointer is an adjustable slotted black painted aluminum pointer.

Dial facing

The dial plate is made from aluminum and coated with UV resistant white coating. The black dial markings, scale, numbering, and interval is according the EN 837. Options like colored dial, customer logo, or colored segments are possible as well. Scale interval and numbering is following the EN837.

Case filling

The gauges cannot be filled.

Restrictor Screw

All gauges can be executed with a restrictor of 0.8 or 0.3 orifice in AISI316(L).

Certification & Declaration

Calibration

Gauges are full range calibrated as a factory standard. Optionally you can select a 5 points calibration certificate. For the BDT33 a calibration certificate of the pressure gauge as well as the pressure sensor is supplied.

EN 10204 material certificate

A material 3.1 certificate on the wetted parts can be supplied (connection and bourdon tube)

Limit stop

To prevent permanent damage after overpressure, or sudden vacuum on size 100mm the gauge is protected by an internal limit stop on the movement that is set just below the minimum scale value and just outside the 130% maximum scale value.

Degree of protection

The BDT33 has a standard degree of protection of IP65. The values are determined according the IEC/EN 60529. Class IP66 and IP67 are available as option.

Certifications

ATEX zone 0 / IECx Zone 0 / North America

Class 1 Div 1 / Class 1 Zone 0

IP65



Wireless Protocols

LoRaWAN 868, 915, 923 MHz



Region specific frequencies and certification upon request.

Dimensions table

Type A (10)

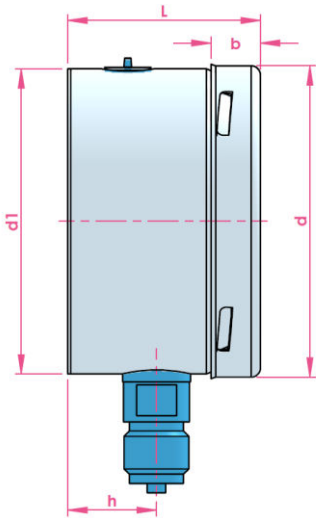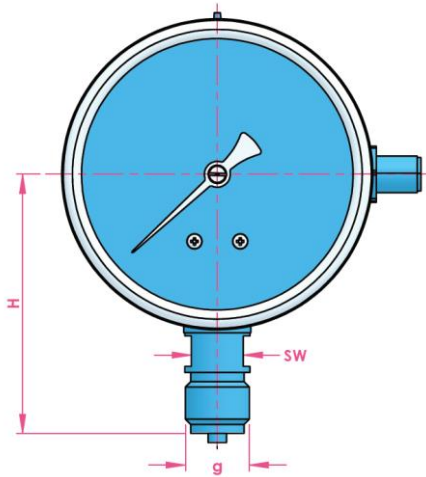

Dial size	d	d1	b	L	h	g	SW	H	weight
100	101.0	99.0	16.0	62.5	28.8	G 1/2	17	85.0	0.5 kg

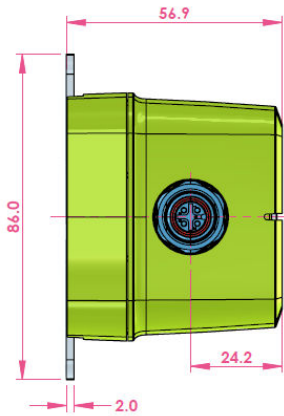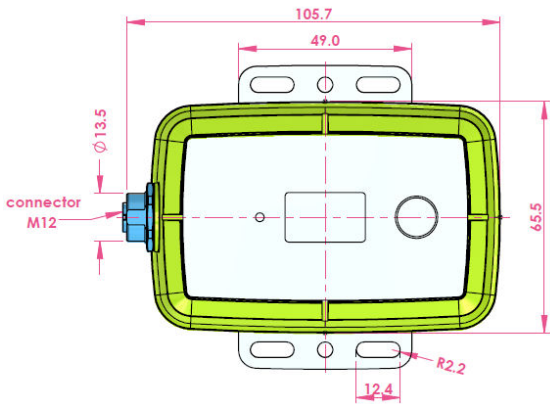

Product code 100mm

Product code 100mm											
Code											
Example code:		BDT33	100	A	G12M	S363	S300	A	0	L	B50 10
TYPE											
100 mm ◀		100									
MOUNTING											
Bottom connection - direct mounting (10) ◀		A									
CONNECTION											
G1/2 ◀		G12M									
1/2" NPT		N12M									
R 1/2		R12M									
M20 x 1.5		M20M									
CONNECTION MATERIAL											
AISI 316(L) ◀		S363									
CASE/BEZEL MATERIAL											
AISI 316 ◀		S300									
POINTER											
Adjustable slotted pointer ◀		A									
Micro adjustable pointer		M									
LIQUID FILLING											
Dry ◀		0									
WINDOW											
Laminated glass (S1) ◀		L									
RANGE											
See page table 1 and table 2										
ACCURACY											
1.0 ◀		10									

◀: is the sign for the standard pressure gauge

Tabel 1: Pressure Range code

bar		psi		MPa		kPa		kgf/cm2	
Code	Range	Code	Range	Code	Range	Code	Range	Code	Range
C36	-1...0,6	C37	30Hg/15psi	N50	0...1,6	D36	-100...60	E36	-1...0,6
C38	-1...1,5	C39	30Hg/30psi	N54	0...2,5	D38	-100...150	E38	-1...1,5
C40	-1...3	C41	30Hg/60psi	N57	0...4	D40	-100...300	E40	-1...3
C42	-1...5	C44	30Hg/100psi	N58	0...6	D42	-100...500	E42	-1...5
C45	-1...9	C46	30Hg/150psi	N60	0...10	D45	-100...900	E45	-1...9
C50	-1...15	C50	30Hg/220psi	N62	0...16	D50	-100...1500	E50	-1...15
C54	-1...24	C53	30Hg/300psi	N65	0...25	D54	-100...2400	E54	-1...24
B01	-1...0	P32	0...10			L01	-100...0	K01	-1...0
B04	-0,6...0	P35	0...15			L04	-60...0	K04	-0,6...0
B31	0...0,6	P37	0...30			L31	0...60	K31	0...0,6
B35	0...1	P40	0...60			L35	0...100	K35	0...1
B36	0...1,6	P43	0...100			L36	0...160	K36	0...1,6
B38	0...2,5	P46	0...160			L38	0...250	K38	0...2,5
B40	0...4	P48	0...200			L40	0...400	K40	0...4
B42	0...6	P51	0...300			L42	0...600	K42	0...6
B45	0...10	P55	0...400			L45	0...1000	K45	0...10
B50	0...16	P56	0...500					K50	0...16
B54	0...25	P57	0...600					K54	0...25
B57	0...40	P58	0...800					K57	0...40
B58	0...60	P59	0...1000					K58	0...60
B60	0...100	P60	0...1500					K60	0...100
B62	0...160	P61	0...2000					K62	0...160
B65	0...250	P64	0...3000					K65	0...250

Table 2: Secondary scale

Dual scale option	code
PSI red	#PR
PSI black	#PB
PSI blue	#PBL
bar red	#BR
bar black	#BB
bar blue	#BBL

Add the code behind the pressure code
(eg B45#PR for 0...10 bar//psi with red scale)

Table 3: General option code

Option (start options with X_)	code
IP 66 class	_IP66
IP 67 Class	_IP67
Restrictor screw 0.8mm	_RS8
Restrictor screw 0.3mm	_RS3
3.1 material certificate	_IC31
Calibration certificate 5 points	_CC5

12th of May 2023

Change log

Date	Change

Holland – Romania – India – Thailand – Dubai – USA

To our knowledge, the information contained herein is accurate as of the date of this document. However neither Badotherm, nor its affiliates makes any warranty, express or limited, or accepts any liability in connection with this information or its use. This information is for technical skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other product. The user alone finally determines suitability of any information or material in contemplated use, the manner of use and whether any patents are infringed. This information gives typical properties only. Badotherm reserves the right to make changes to the specifications any materials without prior notice. The latest version of the datasheet can be found on www.badotherm.com.

© 2015 Badotherm, all rights reserved. Trademarks and/or other products referenced herein are either trademarks or registered trademarks of Badotherm.